

2015 Example of IPPC mark

The mark must be rectangular or square and must have a border. Within the border the IPPC logo and the code components are distinguished from each other by a vertical line. The layout of the mark also has the following characteristics:

NL = ISO-country code for the Netherlands. This code must be distinguished from the unique registration number of the registered company by a hyphen.


000 = unique registration number of the registered company;

YY = treatment applied: heat treatment (HT) or Dielectric Heating (DH)


The treatment code must appear after the ISO country code for the Netherlands and the unique registration number of the registered company respectively. The treatment code must be on a separate line from both the ISO country code for the Netherlands and the unique registration number of the registered company, or must be distinguished by a hyphen if the treatment code is reproduced on the same line as the other codes.

The following examples illustrate several acceptable variations to the required features of the mark:


Example 1

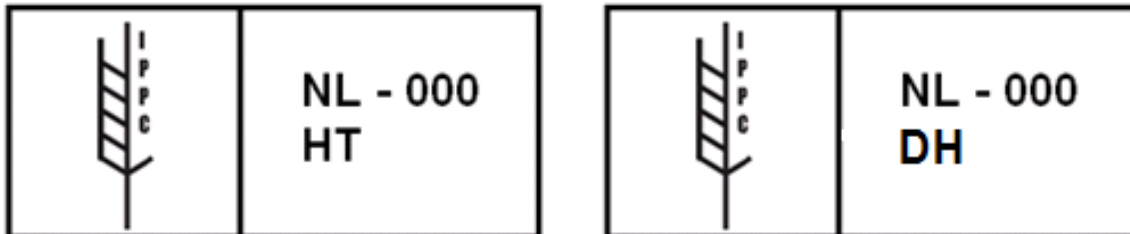


Example 2

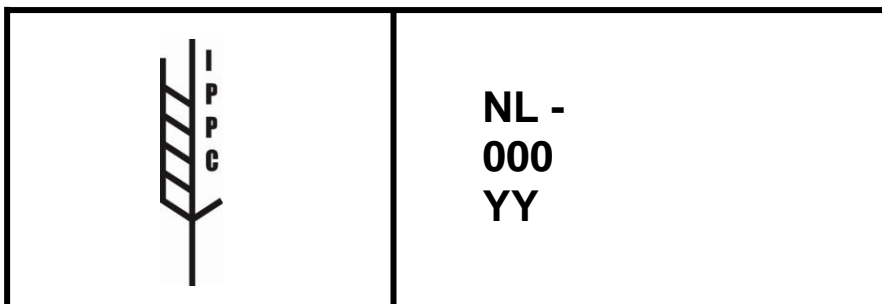


Example 3 (this relates to an example of a mark, the border of which consists of rounded corners)

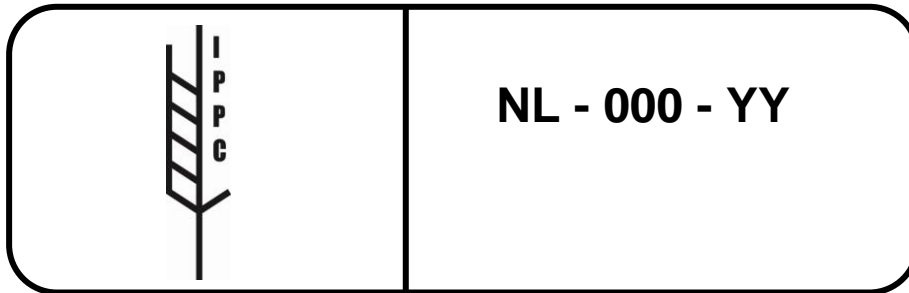


Example 4 (this relates to an example of a mark, the border of which consists of a broken line in several places both horizontally and vertically)

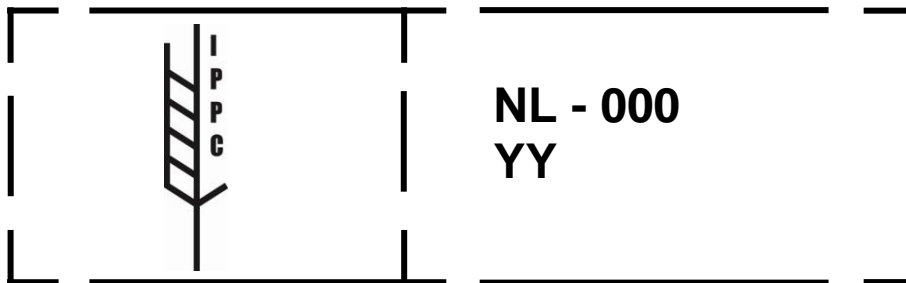

Example 5

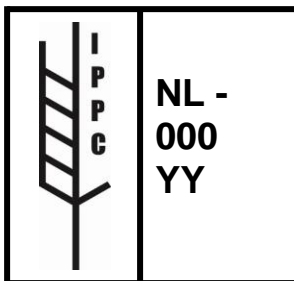

Example 6

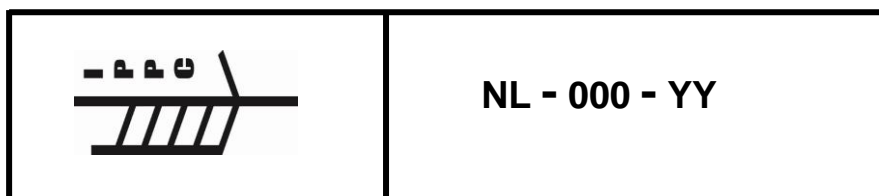


Example 7 (if the mark is applied with a stencil, this must - taking into account the stated variations - comply with the example reproduced below)



Dunnage

The letter D is added outside the mark to indicate dunnage (see example 8) and is the same size as the letters which are situated within the mark. The distance between the letter D placed outside the border and the border may not be larger than the width of the letter D. If added the letter D forms an integral part of the Dutch mark.


Example 8

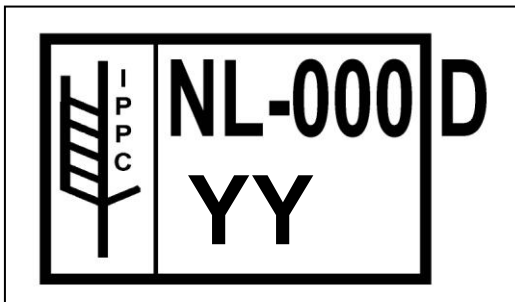

Application of the mark by the treatment operator

A registered company (treatment operator) may apply the IPPC mark of another registered company (manufacturer), taking into account the conditions stated in paragraph 2.9. A letter allocated by the CI, which corresponds to the registered company which treats and applies the mark, is placed after the manufacturer's registration number (see example 9).

Example 9

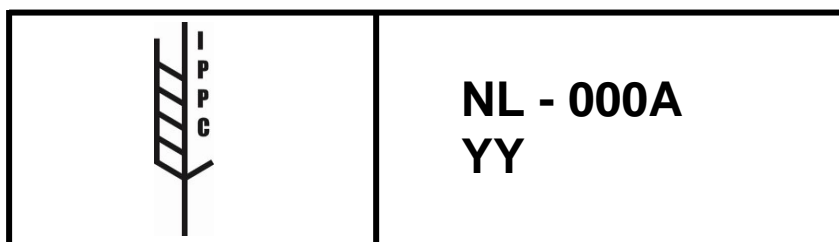

No other variations to the mark are permitted. Variations to the layout of the mark may be accepted on the condition that they comply with the conditions stated in chapter 2.9 and in this appendix.

The following additions may not be included in the mark:

D = Dunnage (loose wood, dunnage)

DB DB as a sign that the wooden packaging has been debarked.